


# FRA

**SERIES**



EXT5114-03/333N-2X4/KS380/FR/DA4A/Y2288/PT

Semi-automatic unit for Rib attach – Auto Position

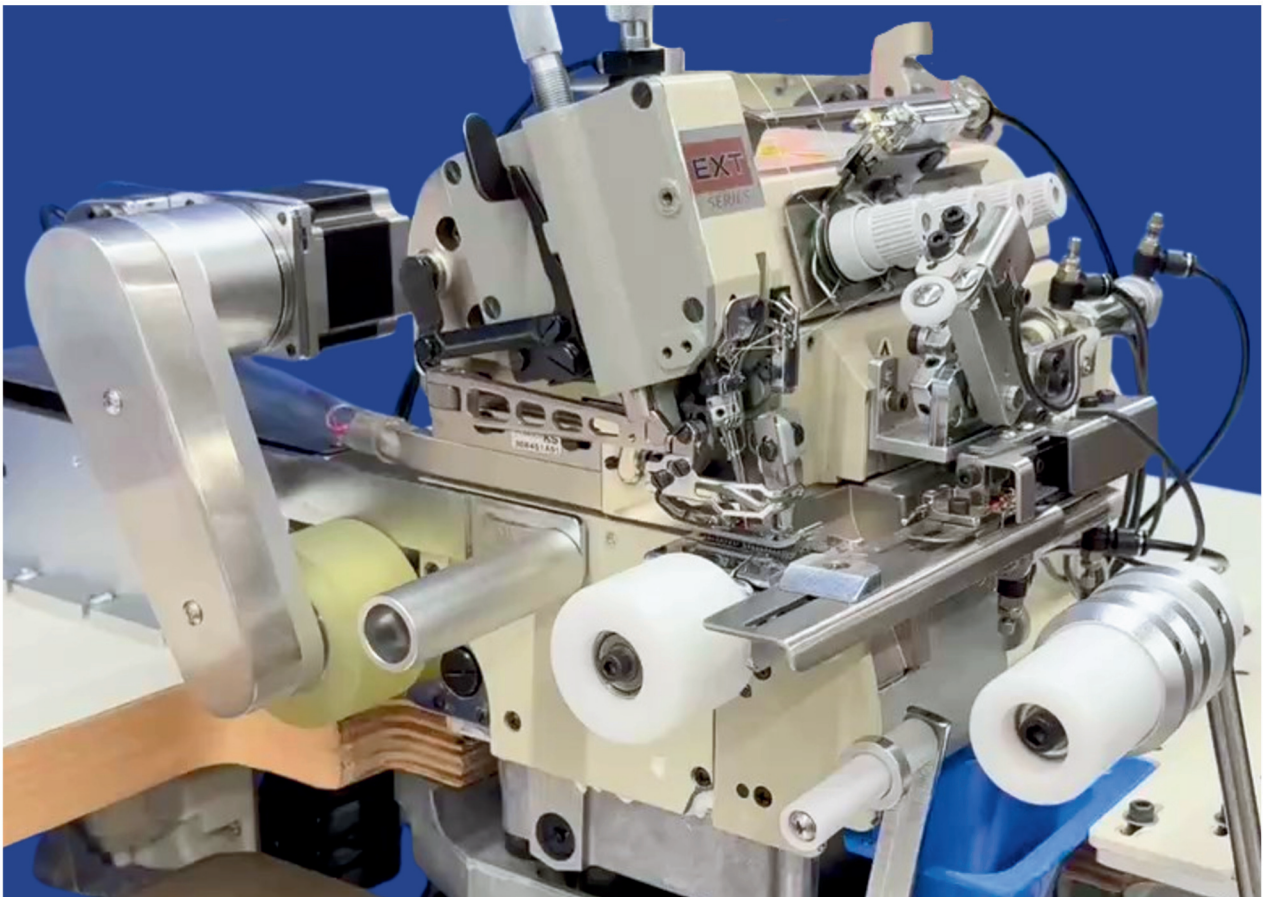


**Automatic alignment of neck rib joint**



- Reduced time on the start of sewing
- Simplified the handling process and improve work efficiency







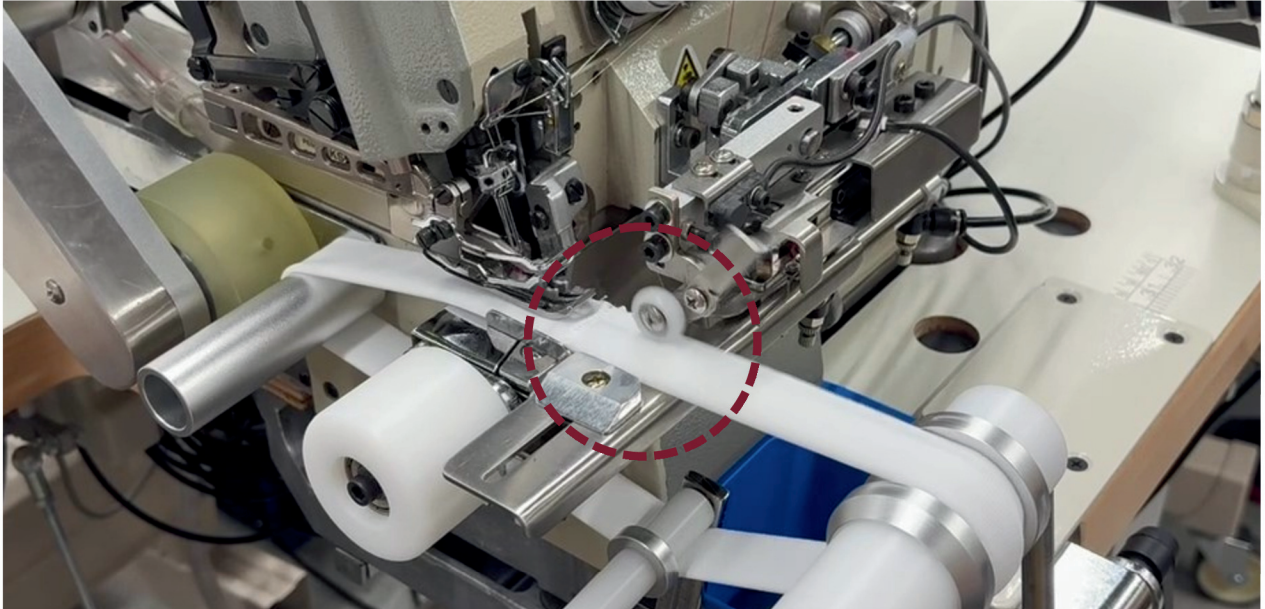





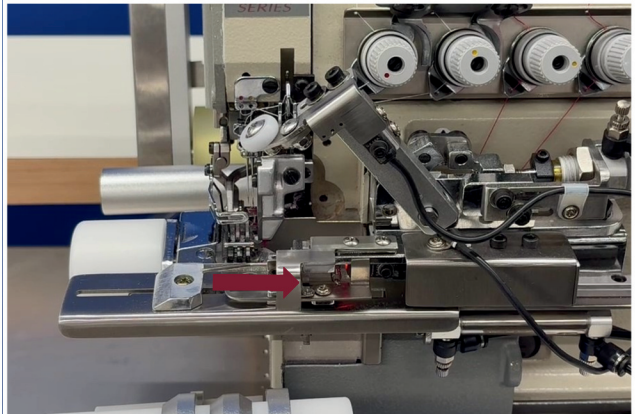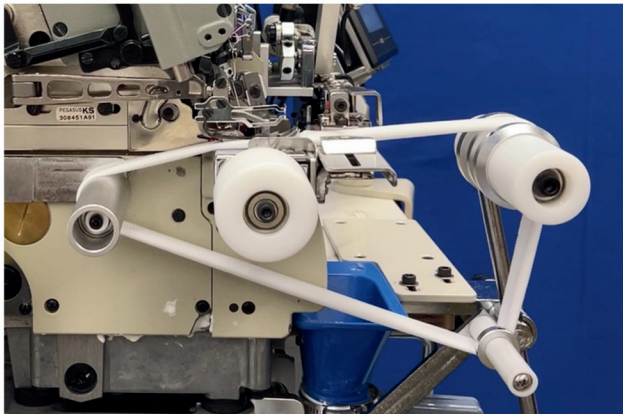



## Automatic alignment of neck rib joint



↔ Adjustable tension pressure

↪ End of seam detection



								Remarks
Model	No. of needles	No. of threads	Needle space (mm)	Overedge width (mm)	Diff. feed ratio	Presser foot lift (mm)	Max speed (sti/min)	
EXT5114-03/333(N)-2×4 (3, 5) /KS380/FR/DA4A/Y2288/PT	2	4	2	3	0.8-1.8	5.5	6700	   
				4				
				5				

# PEGASUS CO., LTD.

5-7-2 Sagisu Fukushima-ku, Osaka 553-0002 Japan  
 TEL : +81-6-6458-4739 FAX : +81-6-6454-8785



-Specifications and appearance are subjected to changes without notice.  
 -Read the instruction manual before operating the machine to ensure safe usage.  
 -Photos for illustration purpose. They may not represent actual operating conditions and/or displayed optional parts.  
 © 2025 PEGASUS CO., LTD. Catalog NO.103325 August 2025.