


M

900 Series

M932/KH/DD3A
M952/KS/DD3A

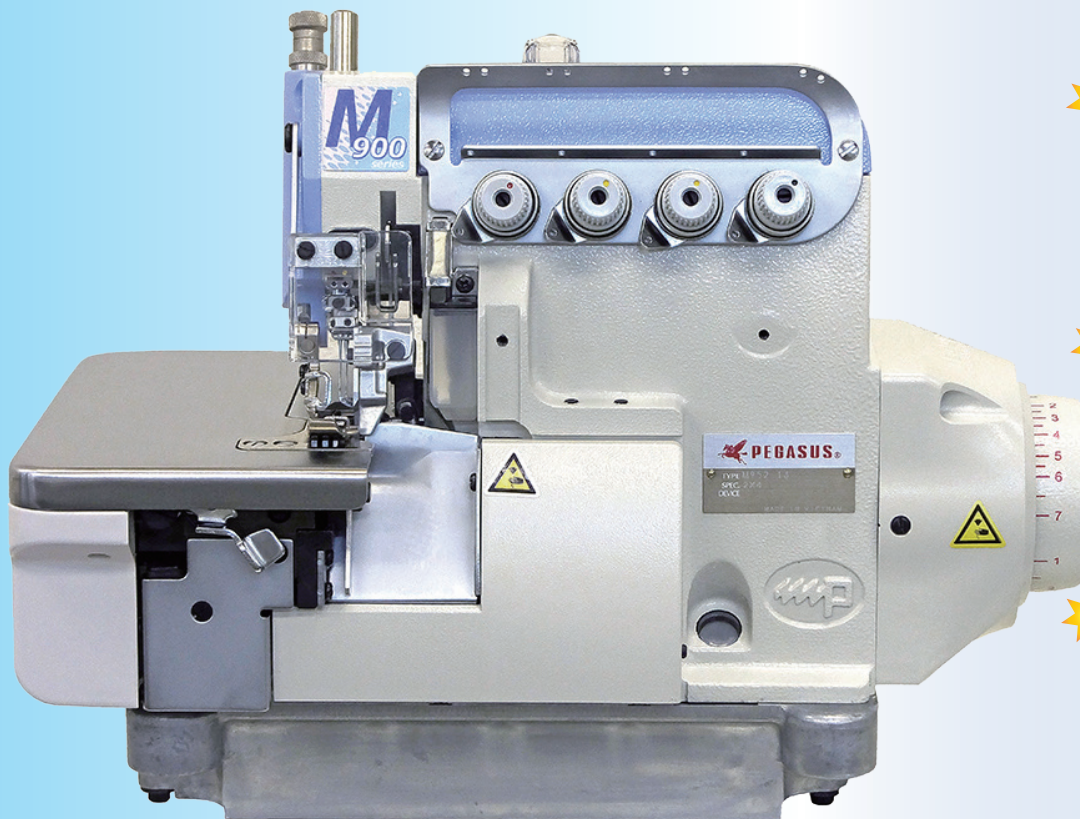

★ User Friendly

- Compact appearance
- Exceptional ease of operation
- High power(550W)

★ Patented Design

- Completely enclosed type motor
(Dust Protection and Heat Prevention)
- No coupling
(Direct Transmission and Easy Setup)

★ Original motor

- Designed and manufactured completely by PEGASUS
- Certified by CE as all-in-one type direct drive motor

Accessories



**FLAT TYPE VACUUM
THREAD CHAIN CUTTER**



The suction inlet is positioned behind the needle plate horizontally.



**VERTICAL TYPE VACUUM
THREAD CHAIN CUTTER**



The suction inlet is positioned vertical to the needle plate.



**NEEDLE THREAD
RELEASING DEVICE**

*Standard on KS8C, KH8C only



The thread chain becomes thinner, so the thread chain can be cut smoothly. In addition, the thread chain will be shortened. Therefore, the thread consumption will be decreased.

M 900 Series

M932/KH8B,KH8C/DD3A : Safety stitch machine

Seam	Application	Fabric weight	Subclass	No.of needles	No.of threads	Needle space (mm)	Overedge width (mm)	Max.stitch length (mm)	Diff. feed ratio	Presser foot lift (mm)	Max.speed (sti/min)	Needles	Accessories
①②	Plain seaming	Medium	M932-38	2	5	3	4	3.7	0.7-1.7	5.5	7,000	DCx27 #14(90)	LC : Pneumatic lint collector PL : Presser foot lift SC : Needle thread releasing *Standard on KH8C only
			M932-70			5	5						
		Extra heavy	M932-86			5	6	5.3	0.6-1.3		5,500	DCx27 #21(130)	
③	3-needle versatile	Medium	M932-355	3	6	3+2	4	3.7	0.7-1.7	5.5	6,000	DCx27 #11(75)	

M952/KS8B,KS8C/DD3A : Overedger / Attaching tape

Seam	Application	Fabric weight	Subclass	No.of needles	No.of threads	Needle space (mm)	Overedge width (mm)	Max.stitch length (mm)	Diff. feed ratio	Presser foot lift (mm)	Max.speed (sti/min)	Needles	Accessories			
④⑤	Plain seaming	Medium	M952-13	2	4	2	4 (5)	3.7	0.7-1.7	5.5	6,000	DCx27 #9(65)	LC : Pneumatic lint collector PL : Presser foot lift SC : Needle thread releasing *Standard on KS8C only			
			M952-13H				4 (5) (7)				7,000					
		Light to medium	M952-52				4 (5)									
			M952-52H								6,000					



PEGASUS CO., LTD.

5-7-2 Sagisu Fukushima-ku, Osaka 553-0002 Japan TEL : +81-6-6458-4739 FAX : +81-6-6454-8785


PEGASUS (TIANJIN) SEWING MACHINE CO., LTD. (Tianjin, China)
TEL: 86-22-2397-1931 FAX: 86-22-2397-1927

PEGASUS EUROPA GmbH (Kaiserslautern, Germany)
TEL: 49-631-371-0990 FAX: 49-631-371-0994-0

PEGASUS CORPORATION OF AMERICA (Miami, U.S.A.)
TEL: 1-305-468-9780 FAX: 1-305-468-9781

PEGASUS SEWING MACHINE PTE. LTD. (Singapore)
TEL: 65-6296-3638 FAX: 65-6297-2353

PEGASUS VIETNAM SEWING MACHINE CO., LTD. (Hai Duong, Vietnam)
TEL: 84-320-357-0271 FAX: 84-320-357-0270



<https://www.pegasus.co.jp/en/>

-Specifications and appearance are subjected to changes without notice.
-Read the instruction manual before operating the machine to ensure safe usage.
-Photos for illustration purpose. They may not represent actual operating conditions and/or displayed optional parts.
© 2021 PEGASUS CO., LTD. Catalog No. 103133 January 2024