




**PEGASUS**

# W522-04

2-needle flatbed double chainstitch machine without top cover thread for attaching tape to files.

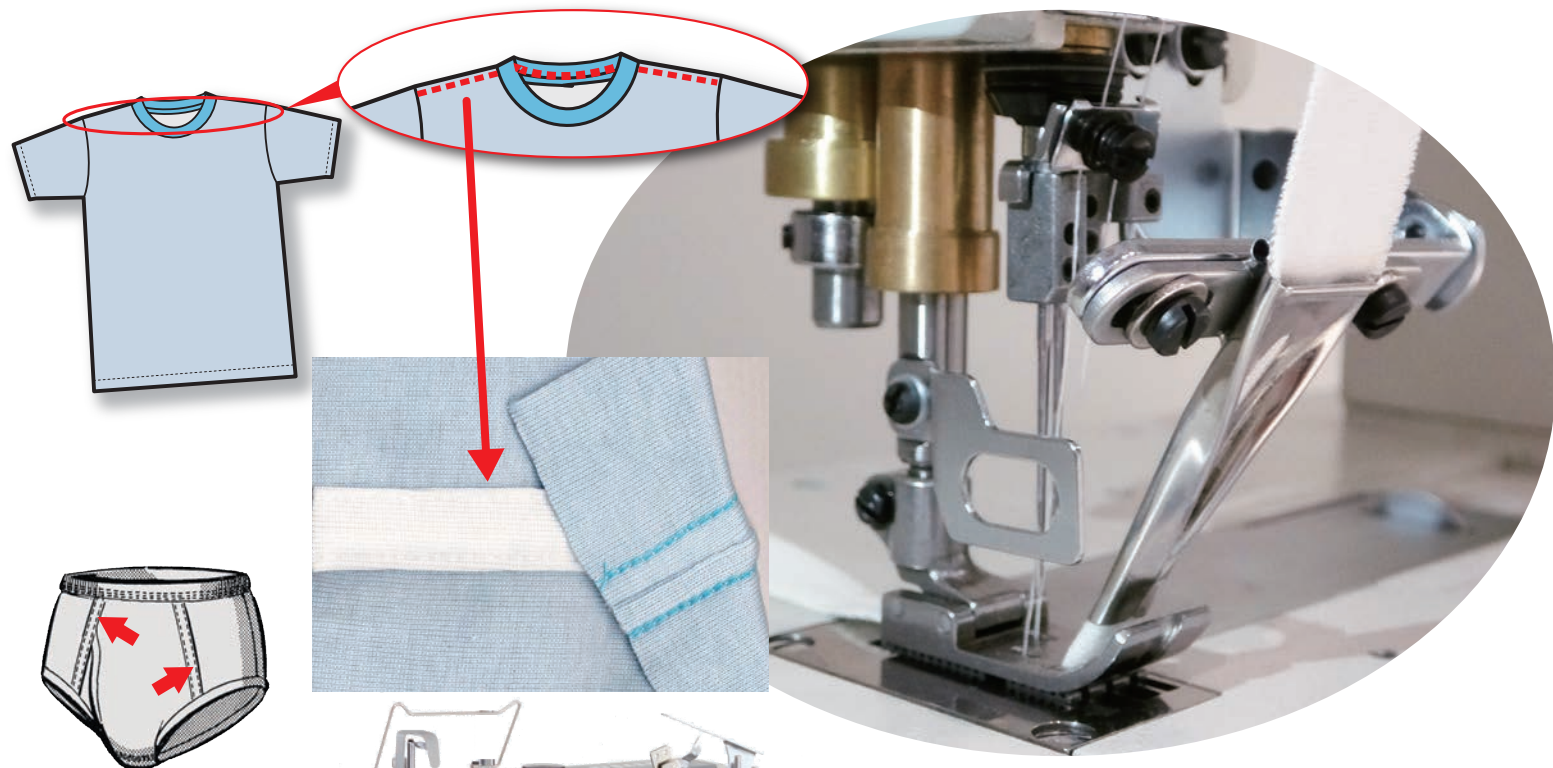

## ■ Devices



## ■ Subclasses

No.of needles	No.of threads	Needle space (mm)	Max.stitch length (mm)	Diff. feed ratio	Presser foot lift (mm)	Max.speed (sti/min)
2	4	6.4 9.5	4.4	1:0.5~1.3	6.0	5,000

- ◆ It is ideal for efficiently attaching tape on briefs front and covering overlock seams with tape on T-shirts shoulders and back of collar necks.
- ◆ Easy-to-use differential feed adjusting lever and stitch length adjusting push button.

## PEGASUS CO., LTD.

5-7-2 Sagisu Fukushima-ku, Osaka 553-0002 Japan TEL : +81-6-6458-4739 FAX : +81-6-6454-8785

-Specifications and appearance are subjected to changes without notice.  
-Read the instruction manual before operating the machine to ensure safe usage.  
-Photos for illustration purpose. They may not represent actual operating conditions and/or displayed optional parts.

©1991 PEGASUS CO., LTD. ③Catalog No.102557 January 2024



**PEGASUS**

# W522-01

2-needle flatbed interlock double chainstitch machine with top cover thread for attaching side pocket facing.

## Reduces the number of operations from two to one



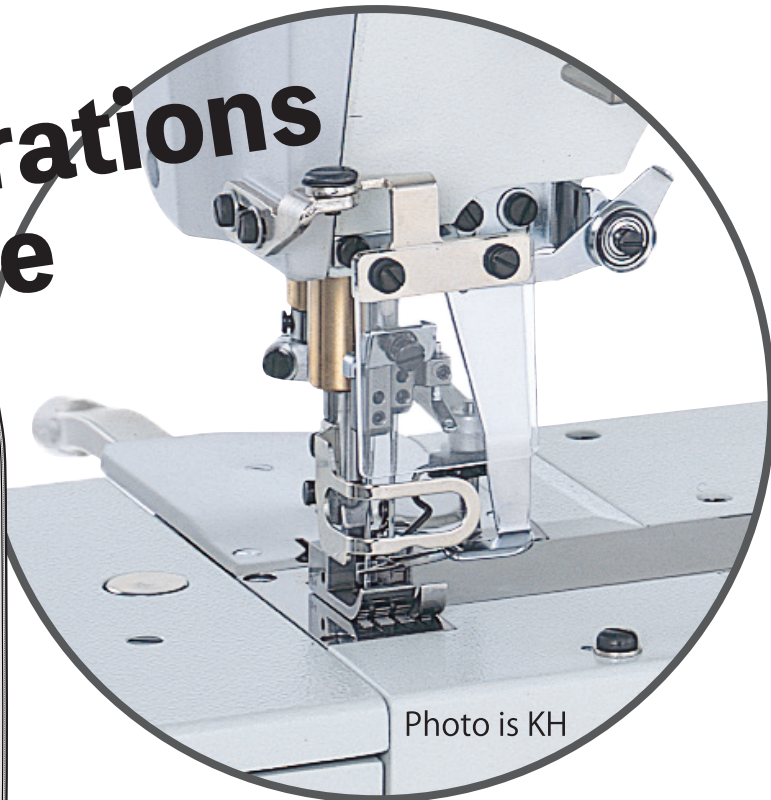


Photo is KH

### ■ Devices

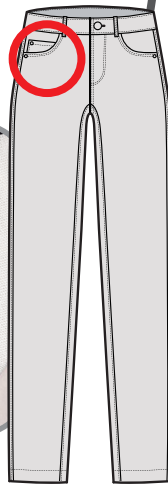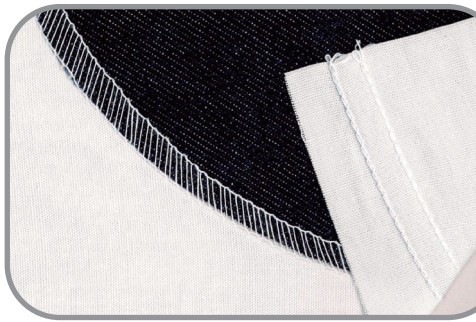

### ■ Subclasses

No.of needles	No.of threads	Needle space (mm)	Max.stitch length (mm)	Diff. feed ratio	Presser foot lift (mm)	Max.speed (sti/min)
2	4	6.4 9.5	4.4	1:0.5~1.3	6.0	5,000

- ◆ For attaching side pocket facing on pocket openings of men's wear, jeans, etc. This machine reduces the number of operations two to one. No other machine is needed for this operation, which previously required serging the facing and attaching it to the pocket on a lockstitch machine. One less operation means a great reducing both in time and labor, and an increase in output.
- ◆ Features special gauges which make the machine easily adaptable to a variety of sewing conditions. Easy-to-thread looper thread guide slides to the operator with the lever, thus increasing productivity.
- ◆ Adjusting lever to adjust the differential feed push button to adjust the stitch length.
- ◆ Optional flat type vacuum chain cutter sucks the thread chain down to trim neatly. This future adds to the efficiency of the operation.

## PEGASUS CO., LTD.

5-7-2 Sagisu Fukushima-ku, Osaka 553-0002 Japan TEL : +81-6-6458-4739 FAX : +81-6-6454-8785

-Specifications and appearance are subjected to changes without notice.  
 -Read the instruction manual before operating the machine to ensure safe usage.  
 -Photos for illustration purpose. They may not represent actual operating conditions and/or displayed optional parts.

©1991 PEGASUS CO., LTD. ©Catalog No.102557 January 2024

