

# Extremely small-sized cylinder bed!



# PEGASUS

Equipped with  
Oil-Barrier

*Oil-Barrier*

## WT169P Series

### "Oil Barrier" type

Variable top feed, interlock stitch machines with an extremely small-sized cylinder bed

W(T)600 Series  
270mm

W(T)200 Series  
177mm

**WT169P Series**  
**113mm**



### Block oil leakage!

The needle bar includes a newly designed oil seal and bushing, exerting dramatic "Oil Barrier" effectiveness, preventing oil leakage and oil splashes. And maintenance is very simple and easy, such as change the oil seal.

#### eco

This feature reduces oil stains on sewn products, decreasing the use of stain remover. The WT169P series is a reliable sewing machine that creates a clean work environment and contributes to global environmental protection.

- Variable top feed, interlock stitch machines with an extremely small-sized cylinder bed (circumference: 113 mm)
- Thanks to this cylinder bed, the sewing of small-sized tubular goods, such as sleeve openings and bottoms of wear for children and babies, which would otherwise be difficult, is easy. This feature increases the quality of sewn products.
- Equipped with the belt type bottom feed mechanism and a top feed dog, these machines sew cross seam sections smoothly, so that no plyshifting and/or twisting occurs on the fabric during sewing. Neatly finished products are obtained.


# WT169P Series

## Subclasses

**WT169P-03**

for Covering


Photo : WT169P-03F×356BT/UT4C

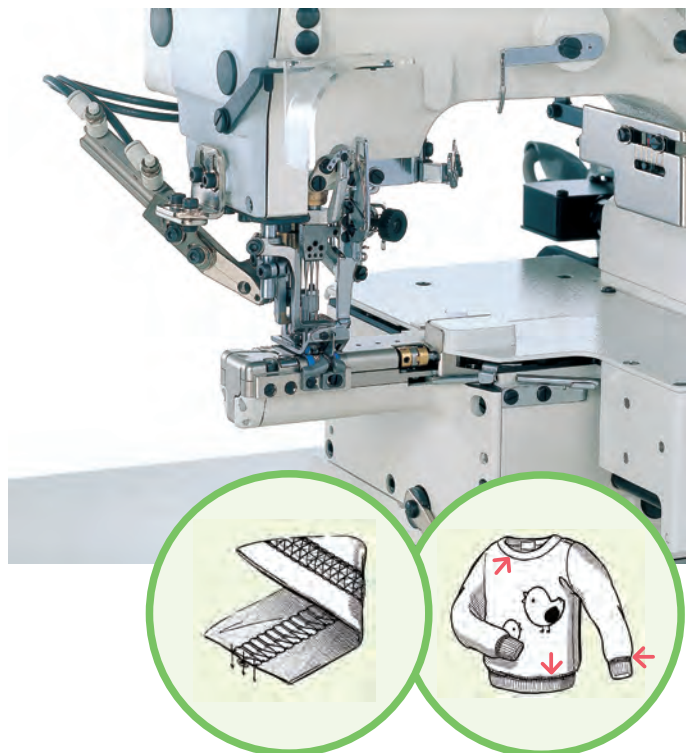

**WT169P-08**

for Hemming

Photo : WT169P-08A×356BT/UT3J

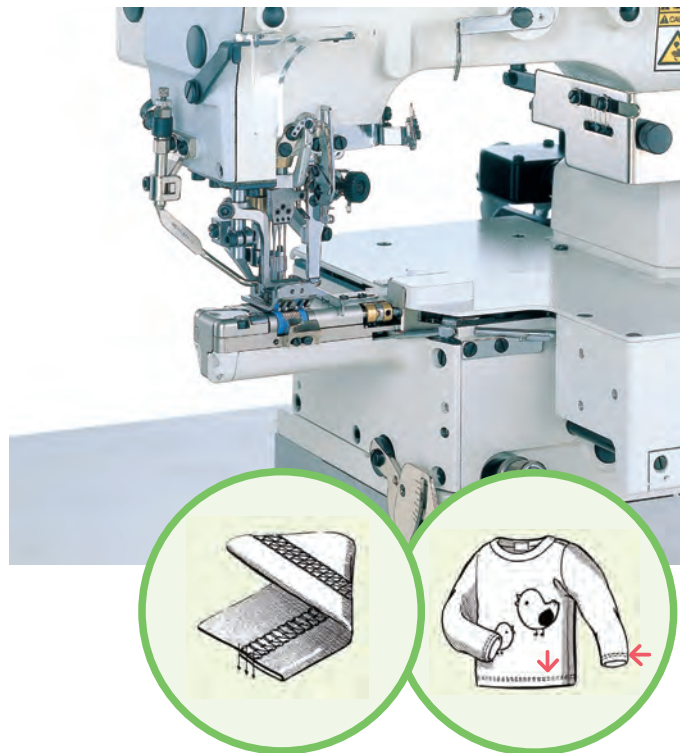

## Common specifications

*1 Subclasses				*2 Type of needle plate					*3 Option
WT169P-03F	3	5	5.6	BT	0.8-3.3	1-3.3	4.5	4,000	Underbed thread trimmer (UT3J/UT4M)
WT169P-03G				BS					
WT169P-08A	2	4	4	BT					
			4.8	BT					
	3	5	5.6	BT/BS					
			6.4	BS					

\*1 -03F : For covering (flatting out overlock seam) / -03G : For covering (folding over overlock seam)  
-08A : For hemming

\*2 BT : For standard stitch length (1.8 to 2.3mm) and forms a soft seam (enough looper thread come out).  
BS : For standard stitch length (1.8 to 2.3mm) and forms a tight seam.

\*3 Please see the following type of UT device.

UT3J : Pneumatic underbed thread trimmer, needle thread wiper, presser foot lift

UT4M : Pneumatic underbed thread trimmer, top cover thread trimmer, presser foot lift

Note: Details of the specifications vary according to each subclass and sewing conditions.



## PEGASUS CO., LTD.

5-7-2 Sagisu Fukushima-ku, Osaka 553-0002 Japan

TEL : +81-6-6458-4739 FAX : +81-6-6454-8785

-Specifications and appearance are subjected to changes without notice.

-Read the instruction manual before operating the machine to ensure safe usage.

-Photos for illustration purpose. They may not represent actual operating conditions and/or displayed optional parts.

