

W600PC

SERIES

OIL BARRIER TYPE, CYLINDER BED, INTERLOCK STITCH MACHINES




Beautiful Seams for



Beautiful Fashion

W600PC SERIES

The ultimate model of the standard machines.

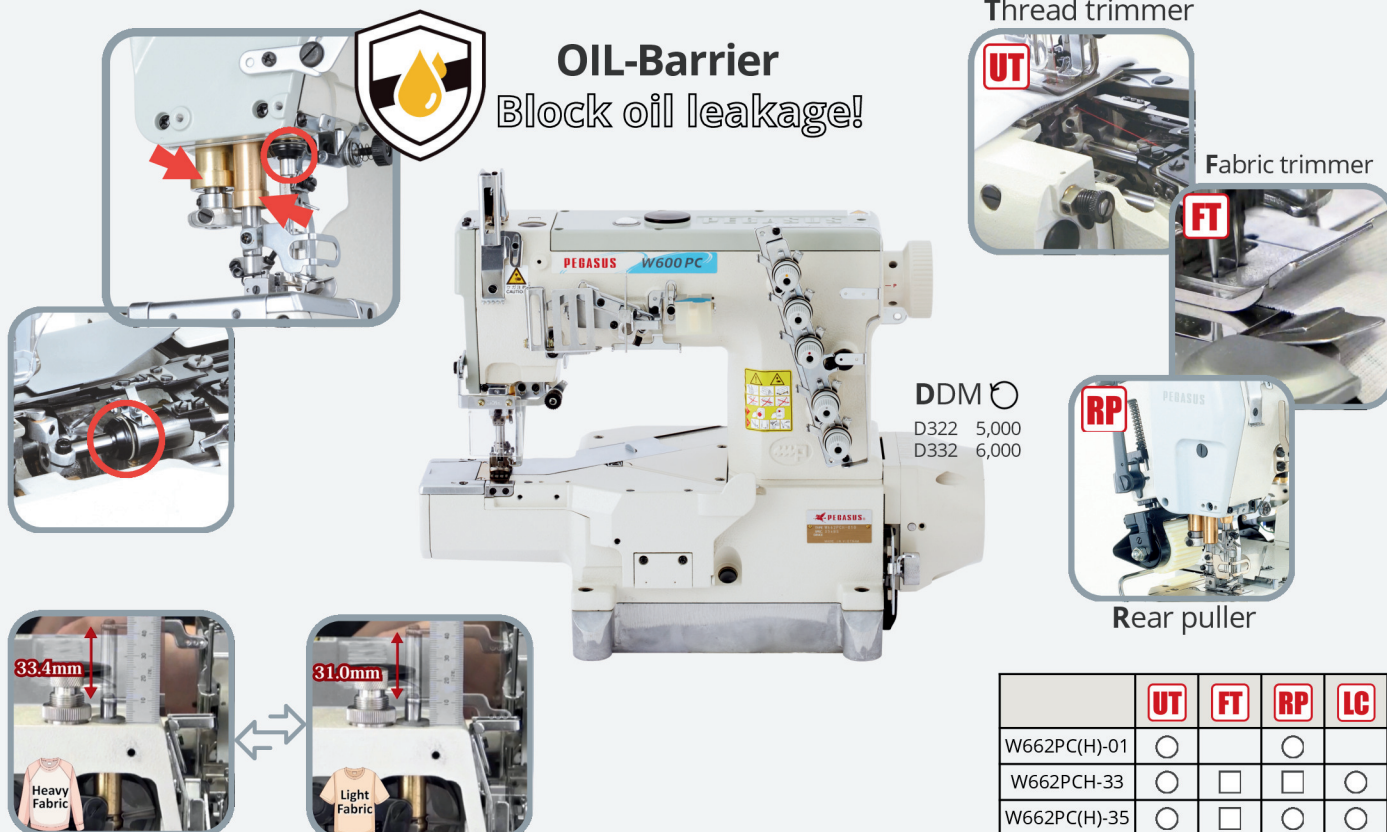

Needle bar stroke can be changed easily, depending on thickness of sewing materials.

	UT	FT	RP	LC
W662PC(H)-01	○		○	
W662PCH-33	○	□	□	○
W662PC(H)-35	○	□	○	○

□... Devices included ○... Option

用途 Application	サブクラス Subclass	針数 Number of needles	糸数 Number of threads	針幅 Needle space (mm)	主送り運動量 Main feed dog's movement amount (mm)	差送り運動量 Differential feed dog's movement amount (mm)	押え上がり量 Presser foot lift (mm)	最高縫い速度 (sti/min) Max. sewing speed (stitches/minute)	備考 Remarks
基本縫い Versatile	W662PC(H)-01G	2	4	3.2・4.0・4.8	1.0-4.4	0.8-6.0	S: 5.1 H: 6.2	S: 6000 H: 5500	
		3	5	5.6 6.4	1.0-4.4	0.8-6.0	S: 5.1 H: 6.2 5.8	S: 6000 H: 5500	
丸物平ゴム付け Attaching flat nit elastic tubular articles	W662PCH-33A	3	5	5.6 6.4	1.0-4.4	0.8-6.0	S: 5.1 H: 5.8 5.4	S: 5000 H: 5000	
裾伏せ Hemming	W662PC(H)-35B	2	4	4.0・4.8	1.0-4.4	0.8-6.0	S: 5.1 H: 6.2	S: 5000 H: 5000	
		3	5	5.6 6.4	1.0-4.4	0.8-6.0	S: 5.1 H: 6.2 5.8	S: 5000 H: 5000	

※ 差送り運動量を 4.5 mm 以上で使用する場合は、ミシンの回転数を 5000 sti/min 以下にしてください。

※ 押え上がり量および最高縫い速度の表記 S と H は、S: 針棒ストロークスタンダード 31mm H: 針棒ストロークハイリフト 33.4mm の場合を表しています。

※ When the amount of movement of the differential feed dog is more than 4.5 mm, the machine speed should be less than 5000 stitches/minute.

※ S and H in the columns of Presser foot lift and Max. sewing speed denote as follows. S: at a needle bar stroke of 31mm (Standard) H: at a needle bar stroke of 33.4mm (High lift)

※ The maximum sewing speed of the D332 sewing machine with direct drive motor is 6,000 and the D322 is 5,000 (stitches/minute)

PEGASUS CO., LTD.

5-7-2 Sagisu Fukushima-ku, Osaka 553-0002 Japan

TEL : +81-6-6458-4739 FAX : +81-6-6454-8785

-Specifications and appearance are subjected to changes without notice.

-Read the instruction manual before operating the machine to ensure safe usage.

-Photos for illustration purpose. They may not represent actual operating conditions and/or displayed optional parts.

