


W522A-01x264/KH

2-needle flatbed interlock double chainstitch machine with top cover thread for attaching side pocket facing with chain cutter.

Reduces the number of operations from two to one.

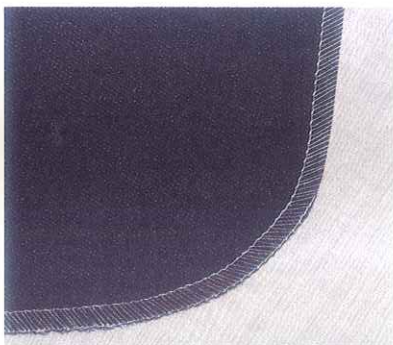

Attaching side pocket facing

- For attaching side pocket facings on pocket openings of mens' wear, jeans, etc. This machine reduces the number of operations two to one. No other machine is needed for this operation, which previously required serging the facing and attaching it to the pocket on a lockstitch machine. One less operation means a great reduction both in time and labor, and an increase in output.
- Features special gauges which make the machine easily adaptable to a variety of sewing conditions. Easy-to-thread looper thread guide slides to the operator with the lever, thus increasing productivity.
- Adjusting lever to adjust the differential feed pushbutton to adjust the stitch length.
- Micro-adjusting screw on the looper holder can make a fine front-to-back adjustment on the lower looper.

Optional flat type vacuum chain cutter sucks the thread chain down to trim neatly. This feature adds to the efficiency of the operation.

■ Specifications

No. of needle	No. of threads	Needle space (mm)	Stitch length (mm)	Diff. feed ratio	Foot lift (mm)	Max. speed (s.p.m.)
2	5	6.4	4.4	0.5~1.3	7	5,000



PEGASUS SEWING MACHINE MFG. CO., LTD.

5-7-2, Sagisu, Fukushima-ku, Osaka 553, Japan
Phone: (06) 454-0561 Telefax: (06) 454-0867

W522-04A

2-needle flatbed double chainstitch machine without top cover thread for attaching tape to flies.

Offers a wider variety
of applications.



- In addition to attaching tape to flies on briefs, it permits you to more efficiently cover overlock seams on shoulders and neck openings of T-shirts with tape to increase applications.
- The flatbed provides larger working space making sewing operations easier on briefs and T-shirts.
- The max. speed 5,000 s.p.m., fast machine dramatically increases production.
- Easy-to-use differential feed adjusting lever and stitch length adjusting button.

Optional Devices

TK320: Pneumatic tape cutter

180-degree rotating tape cutter positioned horizontally to the bed increases the working space.

Can perform a tape attaching operation on briefs and T-shirts more smoothly.

EF120: Electric automatic elastic/tape feeder (vertical feeding)

Uniformly feeds out stretchable elastic/tape to provide high quality products.

Specifications

No. of needle	No. of threads	Needle space (mm)	Stitch length (mm)	Diff. feed ratio	Foot lift (mm)	Max. speed (s.p.m.)
2	4	6.4 9.5	4.4	0.5~1.3	7.0	5,000



PEGASUS SEWING MACHINE MFG. CO., LTD.

5-7-2, Sagisu, Fukushima-ku, Osaka 553, Japan
Phone: (06)454-0561 Telefax: (06)454-0867