

Extremely small-sized cylinder bed!



PEGASUS®

Equipped with
OIL-Barrier

OIL-Barrier

WT169P Series

"Oil Barrier" type

Variable top feed, interlock stitch machines with an extremely small-sized cylinder bed

W(T)600 Series
270mm

W(T)200 Series
177mm

WT169P Series
113mm



Block oil leakage!

The needle bar includes a newly designed oil seal and bushing, exerting dramatic "Oil Barrier" effectiveness, preventing oil leakage and oil splashes. And maintenance is very simple and easy, such as change the oil seal.

eco

This feature reduces oil stains on sewn products, decreasing the use of stain remover. The WT169P series is a reliable sewing machine that creates a clean work environment and contributes to global environmental protection.

- Variable top feed, interlock stitch machines with an extremely small-sized cylinder bed (circumference:113 mm)
- Thanks to this cylinder bed, the sewing of small-sized tubular goods, such as sleeve openings and bottoms of wear for children and babies, which would otherwise be difficult, is easy. This feature increases the quality of sewn products.
- Equipped with the belt type bottom feed mechanism and a top feed dog, these machines sew cross seam sections smoothly, so that no plyshifting and/or twisting occurs on the fabric during sewing. Neatly finished products are obtained.


WT169P Series

Subclasses

WT169P-03

for Covering


Photo : WT169P-03F×356BT/UT4C

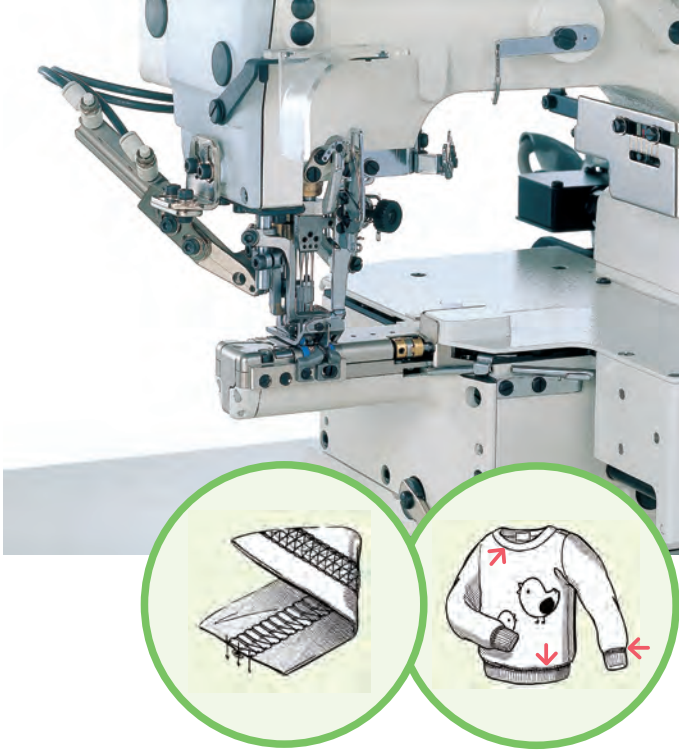





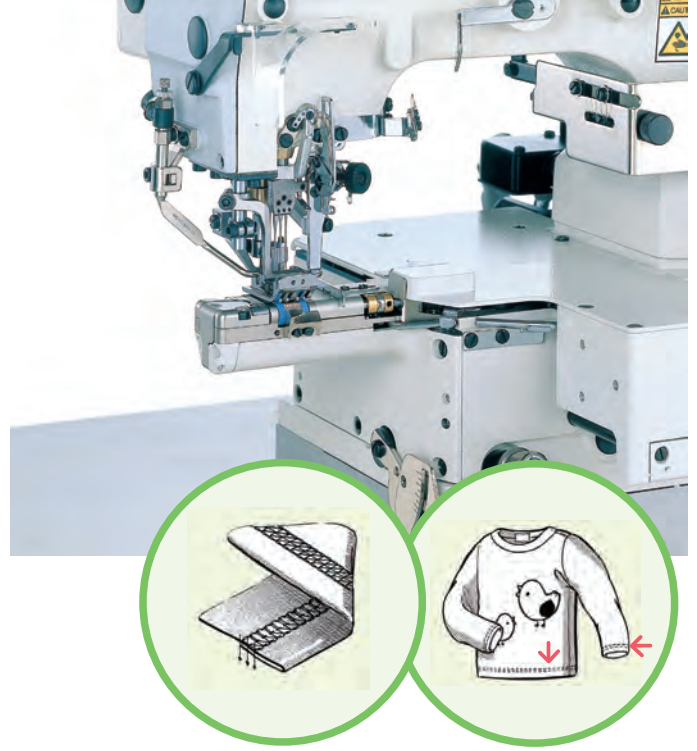


WT169P-08

for Hemming

Photo : WT169P-08A×356BT/UT3J



Common specifications


*1 Subclasses			 mm	*2 Type of needle plate	 mm	 mm	 mm	 sti/min	*3 Option
WT169P-03F	3	5	5.6	BT	0.8-3.3	1-3.3	4.5	4,000	Underbed thread trimmer (UT3J/UT4M)
WT169P-03G				BS					
WT169P-08A	2	4	4	BT					
			4.8	BT					
WT169P-08A	3	5	5.6	BT/BS					
			6.4	BS					

*1 -03F : For covering (flattening out overlock seam) / -03G : For covering (folding over overlock seam)
-08A : For hemming

*2 BT : For standard stitch length (1.8 to 2.3mm) and forms a soft seam (enough looper thread come out).
BS : For standard stitch length (1.8 to 2.3mm) and forms a tight seam.

*3 Please see the following type of UT device.
UT3J : Pneumatic underbed thread trimmer, needle thread wiper, presser foot lift
UT4M : Pneumatic underbed thread trimmer, top cover thread trimmer, presser foot lift

Note: Details of the specifications vary according to each subclass and sewing conditions.

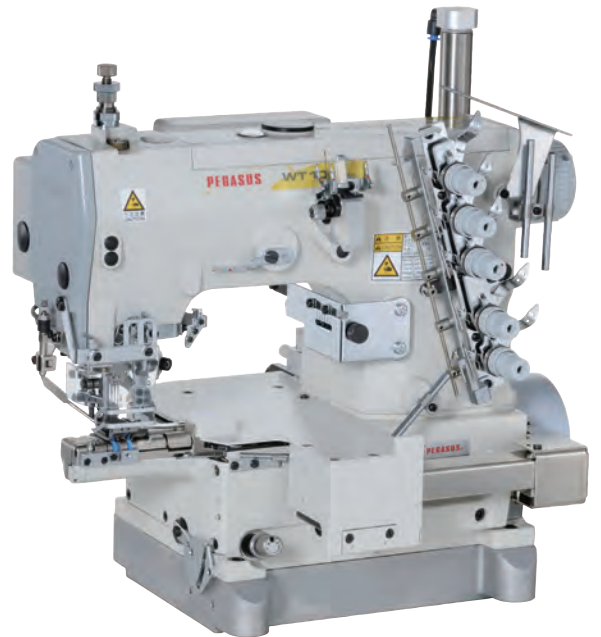

PEGASUS CO., LTD.

5-7-2 Sagisu, Fukushima-ku, Osaka 553-0002, Japan TEL:81-6-6458-4739 TEL:81-6-6454-8785 URL <http://www.pegasus.co.jp>

© 2015 PEGASUS CO., LTD.

① Catalog No. 102961 Produced April 2023

*The specification and / or appearances of the equipment described in this catalog is subject to change because of modification without previous notice.